Belshaw

Type N Compact Cake Donut Depositor

The Type N depositor is frequently used with smaller fryers such as Belshaw Adamatic's 616B. In addition to donuts, it makes excellent hushpuppies, loukoumades, ball-shaped fritters, and more, depending on the mix, recipe used and plunger/cylinder selection. The Type N depositor employs a hand crank to deposit at a rate up to 80 cycles per minute. The internal workings of the Type N ensures a smooth turn of the crank handle and a consistent deposit.

STANDARD FEATURES

- Aluminum alloy frame
- Bronze trip arms and bushings
- Crank handle
- Aluminum hopper (Capacity 12 lbs/5.5 kg)

MOUNTING OPTIONS

- 2 mounting options available (purchased separately)
- Fryer mount with column and short extender arms
- Wall mount with long arms
- Precision height adjuster

ACCESSORIES

- Plungers and cylinders are purchased separately.
- Compatible with Belshaw Type B/Type F plungers and cylinders.

COMPATIBILITY WITH 616B FRYER


• Type N can be used with Belshaw's 616B fryer to form a tabletop donut system (photo on reverse).

SHIPPING DIMENSIONS


- Package for Type N/Plunger/Cylinder/Mounting Brackets:
- Carton size: 16" v 16" x 22" (41 x 41 x 56 cm)
- Shipping weight: 32 lbs (20 kg)
- Additional package if column mount is ordered:
- Carton size: 28" v 3" x 3" (71 x 8 x 8 cm)
- Shipping weight: 6 lbs (3 kg)

CERTIFICATIONS

Certified to NSF-169

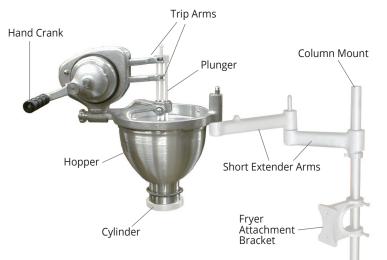

Belshaw Type N shown with column mount and short extender arms. *Mounting system, plunger and cylinder are purchased separately.

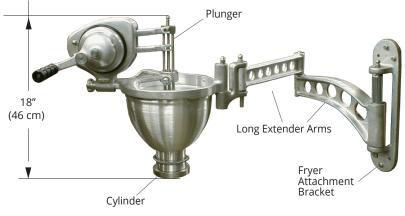

Belshaw Type N shown with wall mount and long extender arms, for bolting to a wall.

*Mounting system, plunger and cylinder are purchased separately.

MODEL SELECTION

Item Number	Options	
N20000	Standard Type N depositor with hopper (Mounting system, plunger, and cylinder not included. Choose from	
	accesssories below)	

ACCESSORIES AND REPLACEMENT ITEMS					
Item Number	Description				
N-1033	Column mount kit with short extender arms. For fryer mount only.				
N-1034	Column mounting kit with long extender arms.				
N-1036 Wall mounting kit with long extender arms.					
N-1002L - Hopper Only	Precision height adjuster.				

PLUNGERS AND CYLINDERS

Each plunger must match a cylinder of the same size. For instance, a 1-3/4" plunger can only be used with a 1-3/4" cylinder. Different plunger types may be used with just one cylinder, if of the same size.



Belshaw.

Product Line PLUNGERS & CYLINDERS Models Type N Compact, Manual Handcrank

APPROXIMATE RING DONUT WEIGHTS

Plunge	er Size	Product Weight (per dozen, after frying)		
in	mm	min	max	
1″	25.4mm	5oz. (142g)	8oz. (227g)	
1-1/2"	38.1mm	12oz. (340g)	15oz. (425g)	
1-3/4″	44.5mm	16oz. (454g)	20oz. (567g)	
1-7/8″	47.6mm	19oz. (539g)	24oz. (680g)	
2″	50.8mm	22oz. (624g)	27oz. (765g)	



Туре N	Part Number	Plunger / Attachment	Plunger	Donut Type
1" Plunger Diameter	N-1007SSx1	PLAIN RING		$\bigcirc \bigcirc$
1-3/4" Plunger Diamet	ter N-1007SSx1-3/4	For standard Ring donuts. Also makes "Old Fashion" donuts using Old Fashion		
2" Plunger Diameter	N-100755x2	donut mix.		
1-3/4" Plunger Diamet	er N-1007SSSx1-3/4	STAR RING For Ring donuts with a star pattern around the center hole.	No.	0
1-3/4" Plunger Diamet	er N-1008SSx1-3/4	FRENCH CRULLER Use with French Cruller mix to make French Crullers. Use with standard cake donut mix to make "French Cake" donuts.		
2" Plunger Diameter	N-1012SSx2	KRINKLE / MOCHI Features eight distinctive ball shaped sections all joined together.Sometimes known as Pon-de-Ring.Commonly used to make Mochi donuts. (needs submerger)		
2" Plunger Diameter, 3 holes - 3/4" holes	N-1009BSS-103C (loukoumades)	BALL Produced ball shaped donuts or donut holes. With a compatible mix recipe,		
2" Plunger Diameter, 3 Oblong holes 7/8" x	1" N-1009BSS-103DB	 can also make other products such as hushpuppies, loukoumades, falafel, African Puff Puff, and more. (needs submerger) 		
2" Plunger Diameter with "Star" pattern hole.	N-1044	CHURRO For churros 2 to 6 inches long. (needs submerger)		
Туре N	Item Numbers	Description		Cylinder
Cymruers	N-1035L-Ax1 N-1035L-Ax1-3/4 N-1035L-Bx1-7/8	Plunger size and cylinder size must mat For example, a 1-3/4" plunger must always be used with a 1-3/4" cylinder. Ye	ou	
1-7/8" and above	N-1035L-Bx2	can use various plungers with a single of the same size.	linder,	

NOTES - 1. Other sizes may be special ordered

Belshaul: 814 44th St NW, Suite 103, Auburn, WA 98001 Belshaw-SS-CDD_N_090624 Phone 1-800-BELSHAW 800.578.2547 (+1)206.322.5474 www.belshaw.com Customer Service info@belshaw.com Technical Support service@belshaw.com



